

型号:CE75DY 日期:2018/01/24 版本号:V1.0

# >>>产品参数 Specification <<<

Page

1/2

## I CODE SLI-X 76x45mm Dry Inlay

### 干Inlay尺寸 Day inlay Size

76x45mm

#### 天线尺寸 Antenna Size

76x45mm

### 天线型号/厚度 Antenna Model / Thickness

#009

0.07-/+0.03mm

### 芯片 Chip

I CODE SLI-X

#### 频段/协议 Resonance Frequency/ Protoco

13.6-14.5Mhz ISO14443A

#### 内存 Memory

UID: 4B NUID

Memory

User memory: 1024 bits

Origination: 16 sectors a 64 byte

### 芯片使用寿命 IC Life


#### 10万次擦写,数据保存10年

100,000 Programming cycles, 10years data retention


#### 读距/读写器 Reading Distance/Reference Reader

3-5cm

ACS ACR122U-A9

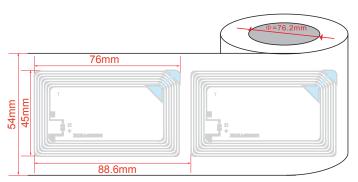

实物图 (Product Image)



天线图(Antenna)



#### 用途 Application

地铁车票 / 公交电子门票 / 物流 / 图书馆/ 等等

Subway tickets/ Bus RFID ticket/ Logistics/ Library



型号: CE75DY 日期: 2018/01/24 版本号: V1.0

## >>>产品参数 Specification <<<

Page

2 /2


# I CODE SLI-X 76x45mm Dry Inlay

特殊工艺 Features

无/NO

包装 Packing









型封、防潮包装、中性标签 数量/卷状 数量/箱 箱子尺寸
Plastic Qty/Roll Qty / carton Dimension
Water-proof
Neutral packing 5000 pcs 5000 pcs 22x22x15CM
10000pcs 44x44x14CM

操作/储存 温度 Temperature / Humidity

操作温度 (Operating Temperature/Humidity):[-15° C to +70° C] 20% to 90% RH Non-condensing; 适用温度 (Storage Temperature/Humidity):[-25° C to +50° C] 20% to 90% RH Non-condensing;

保质期 Shelf Life

使用防静电袋密封包装、在+23°C±5°C/50%±10%RH条件下2年。

From the date of manufacture, 2 year in vacuumed bag at +23°C±5°C / 50%±10%RH)<sub>o</sub>